


HD-1

28 cam High Definition OB Truck

Broadcast / Outside Broadcast

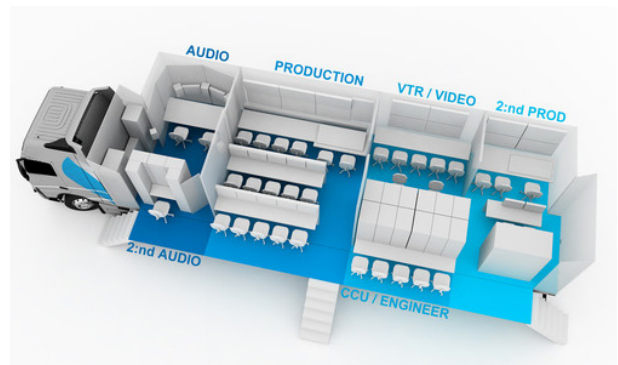

HD-1

Technical data

Vehicle

- Trailer
- Length / Width / Height: 17,5 m / 5,4 m / 4,08 m
- Power 2 x 63 A or 1 x 125 A 3-phase 400 VAC

Cameras

- Grass Valley LDK-8000 HD Worldcam up to 1080P Fiber
- Grass Valley LDK-8300 HD (3 and 2 times speed) up to 1080P Fiber
- Lenses: 11x - 100x

Production 1 (5:1 monitoring)

- Vision Mixer:
- Grass Valley Kayenne
- 4,5 M/E, 96 i/p, 48 o/p, 4 CF M/E, 4 Key M/E, Chroma Key
- Macros, Snapshot, 6 ch RAM Recorder/Still Memory
- Multiple Channel Integrated DVE
- Monitors
- 7 pc. 46" 1920 x 1080 LCD Multiview (1 - 140 previews)
- 5 pc. 23" HD LCD with multiview system, 5 pc. 17" HD LCD

Production 2 (Stereo monitoring)

- Vision Mixer :
- Grass Valley Kayenne
- 3,5 M/E, 72 i/p, 36 o/p, 4 CF M/E, 4 Key M/E, Chroma Key
- Macros, Snapshot, 6 ch RAM Recorder/Still Memory
- Multiple Channel Integrated DVE

Monitors

- 4 pc. 46" 1920 x 1080 LCD Multiview (1 - 80 previews)
- 2 pc. 23" HD LCD with multiview system

Slomo/Vtr:

- 4 pc. 46" 1920 x 1080 LCD with Multiview (1 - 80 previews)
- 14 LCD Monitors, 4 pc. TFT Monitors

Graphics System

On Request

Video Routing - Multiview/Converters

- Pro-Bel Sirius 320 x 512 HD (Expandable to 512 x 512)
- Evertz 28 pc. HD/SDI Cross converter with synchr./Ratio
- Evertz MVP/VIP Multiview system (1920 x 1080) -
- 288 in, 26 HD outputs
- UMD, Audio meter Etc.

Audio Mixer/Router

- LAWO mc66 - Router 8192 x 8192
- 128 mic/Line i/p + 96 x 160 Line in/out
- 228 x 240 AES in/out
- 79 Emb/deembedders
- Fiber to Stageboxes and other Routers + ATM/MADI Ports
- Audio Follow Video
- 3 Dolby-E Enc/Dec, 1 Dolby Digital Enc/Dec
- Rev./Eff. T.C. Electronics 3000, 4000, 6000, Eventide 8000

Audio Cntrl Surface 1 (Mix pos. 1)

- 48+8 Faders, 360 DSP ch., Genelec 5:1 Monitoring
- Audio Cntrl Surface 2 (Mix pos. 2)
- Zirkon: 12 Faders, 44 DSP, 48 sumbuses

Intercom

- RIEDEL 192 x 192 (Expandable), 32 Int. Panels, 12 Ext. -
- 32 Ext. 4-w, 2-w PL Lines, RTS Stereo Beltpacks
- RT - 6 ch. Duplex
- Intergrated with Audio Router
- Fiberport to external matrix

Router/Data Cntrl System

- Broadcast Solutions: 35 LCD cntrl panels, UMD:s -
- Gpi/Tally 128 x 320 Mtx, unlimited serial GPI/Tally Cntr
- Hardware/software redundancy

Vtr/Harddisk

- Sony HD SR / HD Cam / Digi Beta / DVD
- EVS HD XT2, 6 ch. MultiCam, SLSM & Sportnet

